

ELECTRIC WATER HEATERS



EAU.CHAUFFAGE
Where Water Meets Heat

RESIDENTIAL

- 8 L
- 10 L
- 15 L
- 20 L
- 25 L
- 30 L
- 50 L
- 80 L
- 100 L
- 120 L
- 150 L
- 200 L
- 300 L
- 400 L
- 500 L



RESIDENTIAL WATER HEATERS

Embrace Comfort,
Embrace Residential Water Heating

Small Capacity

8L - 500L SMART STYLE



Discovering
a new perspective
on comfort



Corrosion
resistant and more
durable



Enjoy
a shower time



we believe that »

luxury is not just a concept, but a way of life...

With a passion for innovation and an unwavering commitment to engineering excellence, our team of professionals works tirelessly to create heating solutions that not only meet the highest industry standards but also cater to the unique demands of a luxury lifestyle. Our products are meticulously designed, crafted, and tested to provide exceptional performance, energy efficiency, and reliability, allowing you to enjoy the epitome of luxury in every aspect of your life.

Join the EAUCHAUFFAGE family and experience the difference. Together, let's create a brighter future while enjoying the comforts of today.

PATENT TECHNOLOGY




VS



Traditional Circular Seam Welding

Laser Welding Seam Is Uniformed And Symmetrical

OTHERS

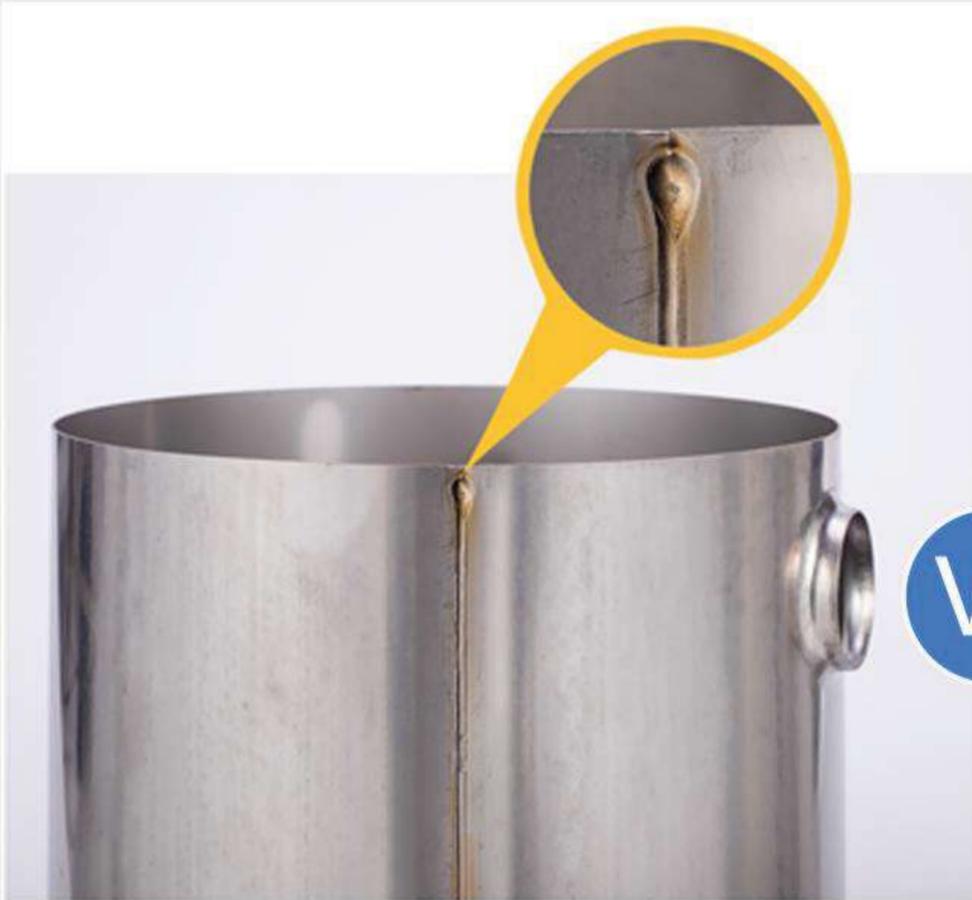

VS



Traditional Hand Welding Has Solder Joints

Uniformed Welding Seam Is Symmetrical

OTHERS





At EAUCHAUFFAGE

we take pride in being a leading Canadian brand that brings together the perfect fusion of elegance, functionality, and environmental consciousness. With a strong focus on family well-being, energy efficiency, and clean water solutions, we are dedicated to enhancing your everyday life through our exceptional water heating products.



Environmentally Conscious:

Preserving the environment is at the core of our philosophy. We are committed to reducing our carbon footprint and promoting sustainability. Our water heaters are designed to optimize energy efficiency, minimizing wastage and maximizing savings. By choosing EAUCHAUFFAGE, you contribute to a greener future for generations to come.



Motion with Purpose:

Our brand is in constant motion, driven by a passion for creating innovative solutions that elevate the water heating experience. We understand the importance of family and the valuable moments shared, which is why our products are designed to provide optimal comfort and convenience for your loved ones.



Clean Water Solutions:

We understand the significance of clean and pure water for your family's health and well-being. Our water heaters incorporate advanced clean materials, ensuring that every drop that reaches your tap is free from impurities and contaminants. Enjoy the peace of mind that comes with knowing your family has access to safe and clean water.



Luxurious Comfort:

Immerse yourself in a world of luxury as our water heaters seamlessly blend with your upscale lifestyle. With meticulous attention to detail and cutting-edge technology, our products offer unparalleled comfort, ensuring that every shower or faucet moment becomes an indulgent experience.



Embrace a New Standard:

EAUCHAUFFAGE sets a new standard for water heating, where style, functionality, and eco-consciousness intertwine harmoniously. We invite you to discover a world of luxury, where your family's comfort, environmental sustainability, and clean water are our top priorities.



At EAUCHAUFFAGE we believe

Each of our water heaters is meticulously crafted to deliver exceptional performance, superior efficiency, and unmatched reliability. With customizable specifications, we ensure that our products meet the unique requirements of our clients, providing tailored solutions for their specific needs.

Whether you need a water heater for your luxury residence, hotel, or commercial establishment, our product range offers a comprehensive selection to suit various capacities and applications. Experience the pinnacle of quality, comfort, and energy efficiency with EAUCHAUFFAGE water heaters.

- ▶ Energy-efficient design for reduced energy consumption
- ▶ High-quality components for long-lasting performance
- ▶ Environmentally-friendly operation for a sustainable lifestyle
- ▶ Customizable specifications to meet client requirements
- ▶ Exquisite design with a focus on luxury and elegance
- ▶ Advanced heating technology for fast and efficient water heating
- ▶ Smart controls and customization options for personalized usage
- ▶ Energy-saving features for cost-effective operation



ROUND SERIES



WS-A1

SPECIFICATION

- Rated Voltage:220V~240V
- Rated Frequency:50Hz/60Hz
- Rated Power:2000W
- Temperature Range:30-75°C
- Rated Pressure: 0.7MPa



Capacity (L)	30L	50L	80L	100L	120L	150L
Product size (mm)	340*340*540	340*340*766	410*410*800	410*410*950	410*410*1110	410*410*1325
Packing size (mm)	620*390*390	840*390*390	870*460*460	1020*460*460	1175*460*460	1395*460*460
N.W.(kg)	6.5	8.5	12	13.5	16.5	21
G.W.(kg)	7.5	9.5	14	16.5	19	24
Loading qty (20GP/40HQ)	275/690	203/510	141/350	120/300	104/260	88/220



WS-A2

Capacity (L)	30L	50L	80L	100L	120L	150L
Product size (mm)	340*340*540	340*340*766	410*410*800	410*410*950	410*410*1110	410*410*1325
Packing size (mm)	620*390*390	840*390*390	870*460*460	1020*460*460	1175*460*460	1395*460*460
N.W.(kg)	6.5	8.5	12	13.5	16.5	21
G.W.(kg)	7.5	9.5	14	16.5	19	24
Loading qty (20GP/40HQ)	275/690	203/510	141/350	120/300	104/260	88/220

ROUND SERIES



WS-B15



Capacity (L)	30L	50L	80L	100L	120L	150L
Product size (mm)	340*340*540	340*340*766	410*410*800	410*410*950	410*410*1110	410*410*1325
Packing size (mm)	620*390*390	840*390*390	870*460*460	1020*460*460	1175*460*460	1395*460*460
N.W.(kg)	6.5	8.5	12	13.5	16.5	21
G.W.(kg)	7.5	9.5	14	16.5	19	24
Loading qty (20GP/40HQ)	275/690	203/510	141/350	120/300	104/260	88/220




Capacity (L)	30L	40L	50L
Product size (mm)	775*270*270	985*270*270	1250*270*270
Packing size (mm)	825*310*315	1035*310*315	1265*310*315
N.W.(kg)	7.5	9.5	11.5
G.W.(kg)	9.5	11.5	13.5
Loading qty (20GP/40HQ)	350/830	260/660	210/550



WS-X11

HORIZONTAL SERIES

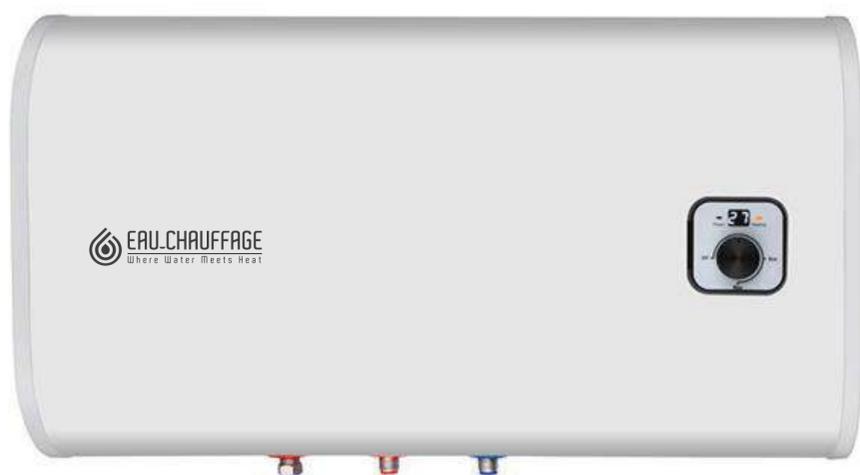

WS-B17H

SPECIFICATION

- Rated Voltage:220V~240V
- Rated Frequency:50Hz/60Hz
- Rated Power:2000W
- Temperature Range:30-75°C
- Rated Pressure: 0.7MPa



Capacity (L)	30L	50L	80L	100L
Product size (mm)	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size (mm)	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty (20GP/40HQ)	280/730	190/495	136/350	113/290



WS-B34DH

Capacity (L)	30L	50L	80L	100L
Product size (mm)	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size (mm)	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty (20GP/40HQ)	280/730	190/495	136/350	113/290

HORIZONTAL SERIES



WS-B36JH

Capacity (L)	30L	50L	80L	100L
Product size (mm)	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size (mm)	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty (20GP/40HQ)	280/730	190/495	136/350	113/290



WS-T11H

Capacity (L)	30L	50L	80L	100L
Product size (mm)	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size (mm)	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty (20GP/40HQ)	280/730	190/495	136/350	113/290

FLAT SERIES (MECHANICAL)



WS-B12J

SPECIFICATION

- Rated Voltage:220V~240V
- Rated Frequency:50Hz/60Hz
- Rated Power:2000W
- Temperature Range:30-75°C
- Rated Pressure: 0.7MPa



Capacity (L)	30L	50L	80L	100L
Product size (mm)	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size (mm)	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty (20GP/40HQ)	280/730	190/495	136/350	113/290



Capacity (L)	30L	50L	80L	100L
Product size (mm)	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size (mm)	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty (20GP/40HQ)	280/730	190/495	136/350	113/290



WS-B7J

FLAT SERIES (MECHANICAL)

WS-B33

EAU-CHAUFFAGE
Where Water Meets Heat

-  Safety Protective
-  Multifunctional Value
-  Vertical & Horizontal Installation
-  75°C High Precision Thermostat
-  Earthing Protection
-  Thermal Cutout
-  PUF Insulation
-  Temperature Control Knob
-  IPX4 Water Proof Grade
-  SUS304/316 tank
-  Double Tank
-  Magnesium Anode
-  LED Digital Display

Capacity (L)	30L	50L	80L	100L
Product size (mm)	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size (mm)	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty (20GP/40HQ)	280/730	190/495	136/350	113/290

FLAT SERIES (MECHANICAL)



WS-B16



Capacity (L)	30L	50L	80L	100L
Product size (mm)	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size (mm)	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty (20GP/40HQ)	280/730	190/495	136/350	113/290



Capacity (L)	30L	50L	80L	100L
Product size (mm)	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size (mm)	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty (20GP/40HQ)	280/730	190/495	136/350	113/290



WS-B17J

FLAT SERIES (MECHANICAL)



EAU.CHAUFFAGE
Where Water Meets Heat



Capacity (L)	30L	50L	80L	100L
Product size (mm)	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size (mm)	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty (20GP/40HQ)	280/730	190/495	136/350	113/290

WS-B27



Capacity (L)	30L	50L	80L	100L
Product size (mm)	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size (mm)	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty (20GP/40HQ)	280/730	190/495	136/350	113/290



WS-B31

FLAT SERIES (MECHANICAL)



WS-B37



Double Tank



SUS304/316 tank



Magnesium Anode



Safety Protective



Multifunctional Value



Vertical & Horizontal Installation



High Precision Thermostat



Earthing Protection



Thermal Cutout



Polyurethane Insulation



Temperature Control Knob



Water Proof Grade



LED Digital Display

Capacity (L)	30L	50L	80L	100L
Product size (mm)	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size (mm)	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty (20GP/40HQ)	280/730	190/495	136/350	113/290

FLAT SERIES (MECHANICAL)



WS-B38-H



WS-B38-V

- Thermal Cutout
- Magnesium Anode
- Safety Protective
- Multifunctional Valve
- Vertical & Horizontal Installation
- SUS304/316 tank
- ENERGYSAVING PUF Insulation
- Polyurethane Insulation
- Temperature Control Knob
- Water Proof Grade
- LED Digital Display
- Double Tank
- Earthing Protection
- 75°C High Precision Thermostat

Capacity (L)	30L	50L	80L	100L
Product size (mm)	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size (mm)	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty (20GP/40HQ)	280/730	190/495	136/350	113/290

- Double Tank
- SUS304/316 tank
- Magnesium Anode
- Safety Protective
- Multifunctional Valve
- Earthing Protection
- Thermal Cutout
- ENERGYSAVING PUF Insulation
- Polyurethane Insulation
- Temperature Control Knob
- Water Proof Grade
- 75°C High Precision Thermostat
- LED Digital Display
- Vertical & Horizontal Installation

Capacity (L)	30L	50L	80L	100L
Product size (mm)	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size (mm)	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty (20GP/40HQ)	280/730	190/495	136/350	113/290



WS-B35

FLAT SERIES (MECHANICAL)



WS-T15



Double Tank



SUS304/316 tank



Magnesium Anode



Safety Protective



Multifunctional Value



Water Proof Grade



High Precision Thermostat



Earthing Protection



Thermal Cutout



Polyurethane Insulation



LED Digital Display

Capacity (L)	30L	50L	80L	100L
Product size (mm)	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size (mm)	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty (20GP/40HQ)	280/730	190/495	136/350	113/290

FLAT SERIES (COMPUTER)



EAU-CHAUFFAGE
Where Water Meets Heat


WS-B6D

SPECIFICATION

- Rated Voltage:220V~240V
- Rated Frequency:50Hz/60Hz
- Rated Power:2000W
- Temperature Range:30-75°C
- Rated Pressure: 0.7MPa



Capacity (L)	30L	50L	80L	100L
Product size (mm)	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size (mm)	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty (20GP/40HQ)	280/730	190/495	136/350	113/290

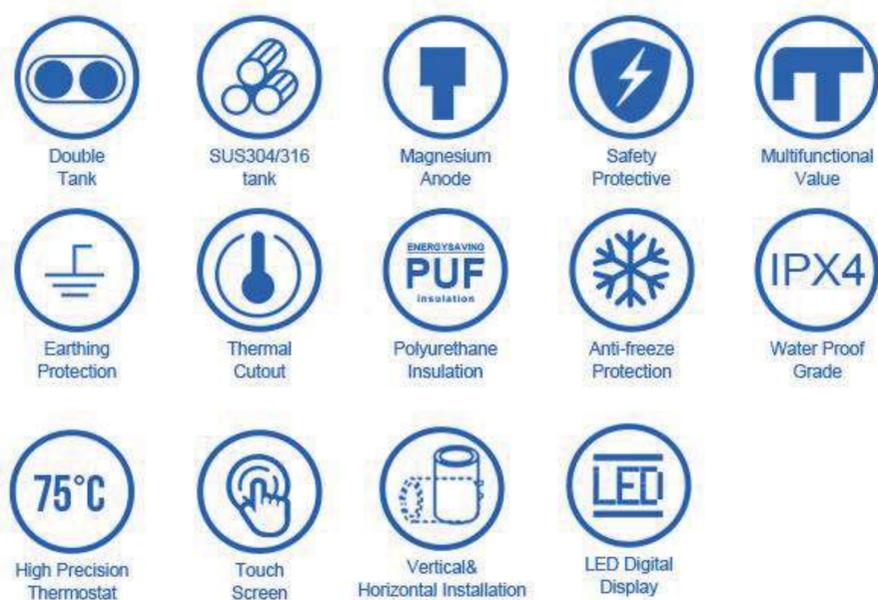

WS-B23



WS-B23J

Capacity (L)	30L	50L	80L	100L
Product size (mm)	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size (mm)	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty (20GP/40HQ)	280/730	190/495	136/350	113/290

FLAT SERIES (COMPUTER)



WS-B38D



Capacity (L)	30L	50L	80L	100L
Product size (mm)	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size (mm)	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty (20GP/40HQ)	280/730	190/495	136/350	113/290




Capacity (L)	30L	50L	80L	100L
Product size (mm)	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size (mm)	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty (20GP/40HQ)	280/730	190/495	136/350	113/290

WS-B25



FLAT SERIES (COMPUTER)

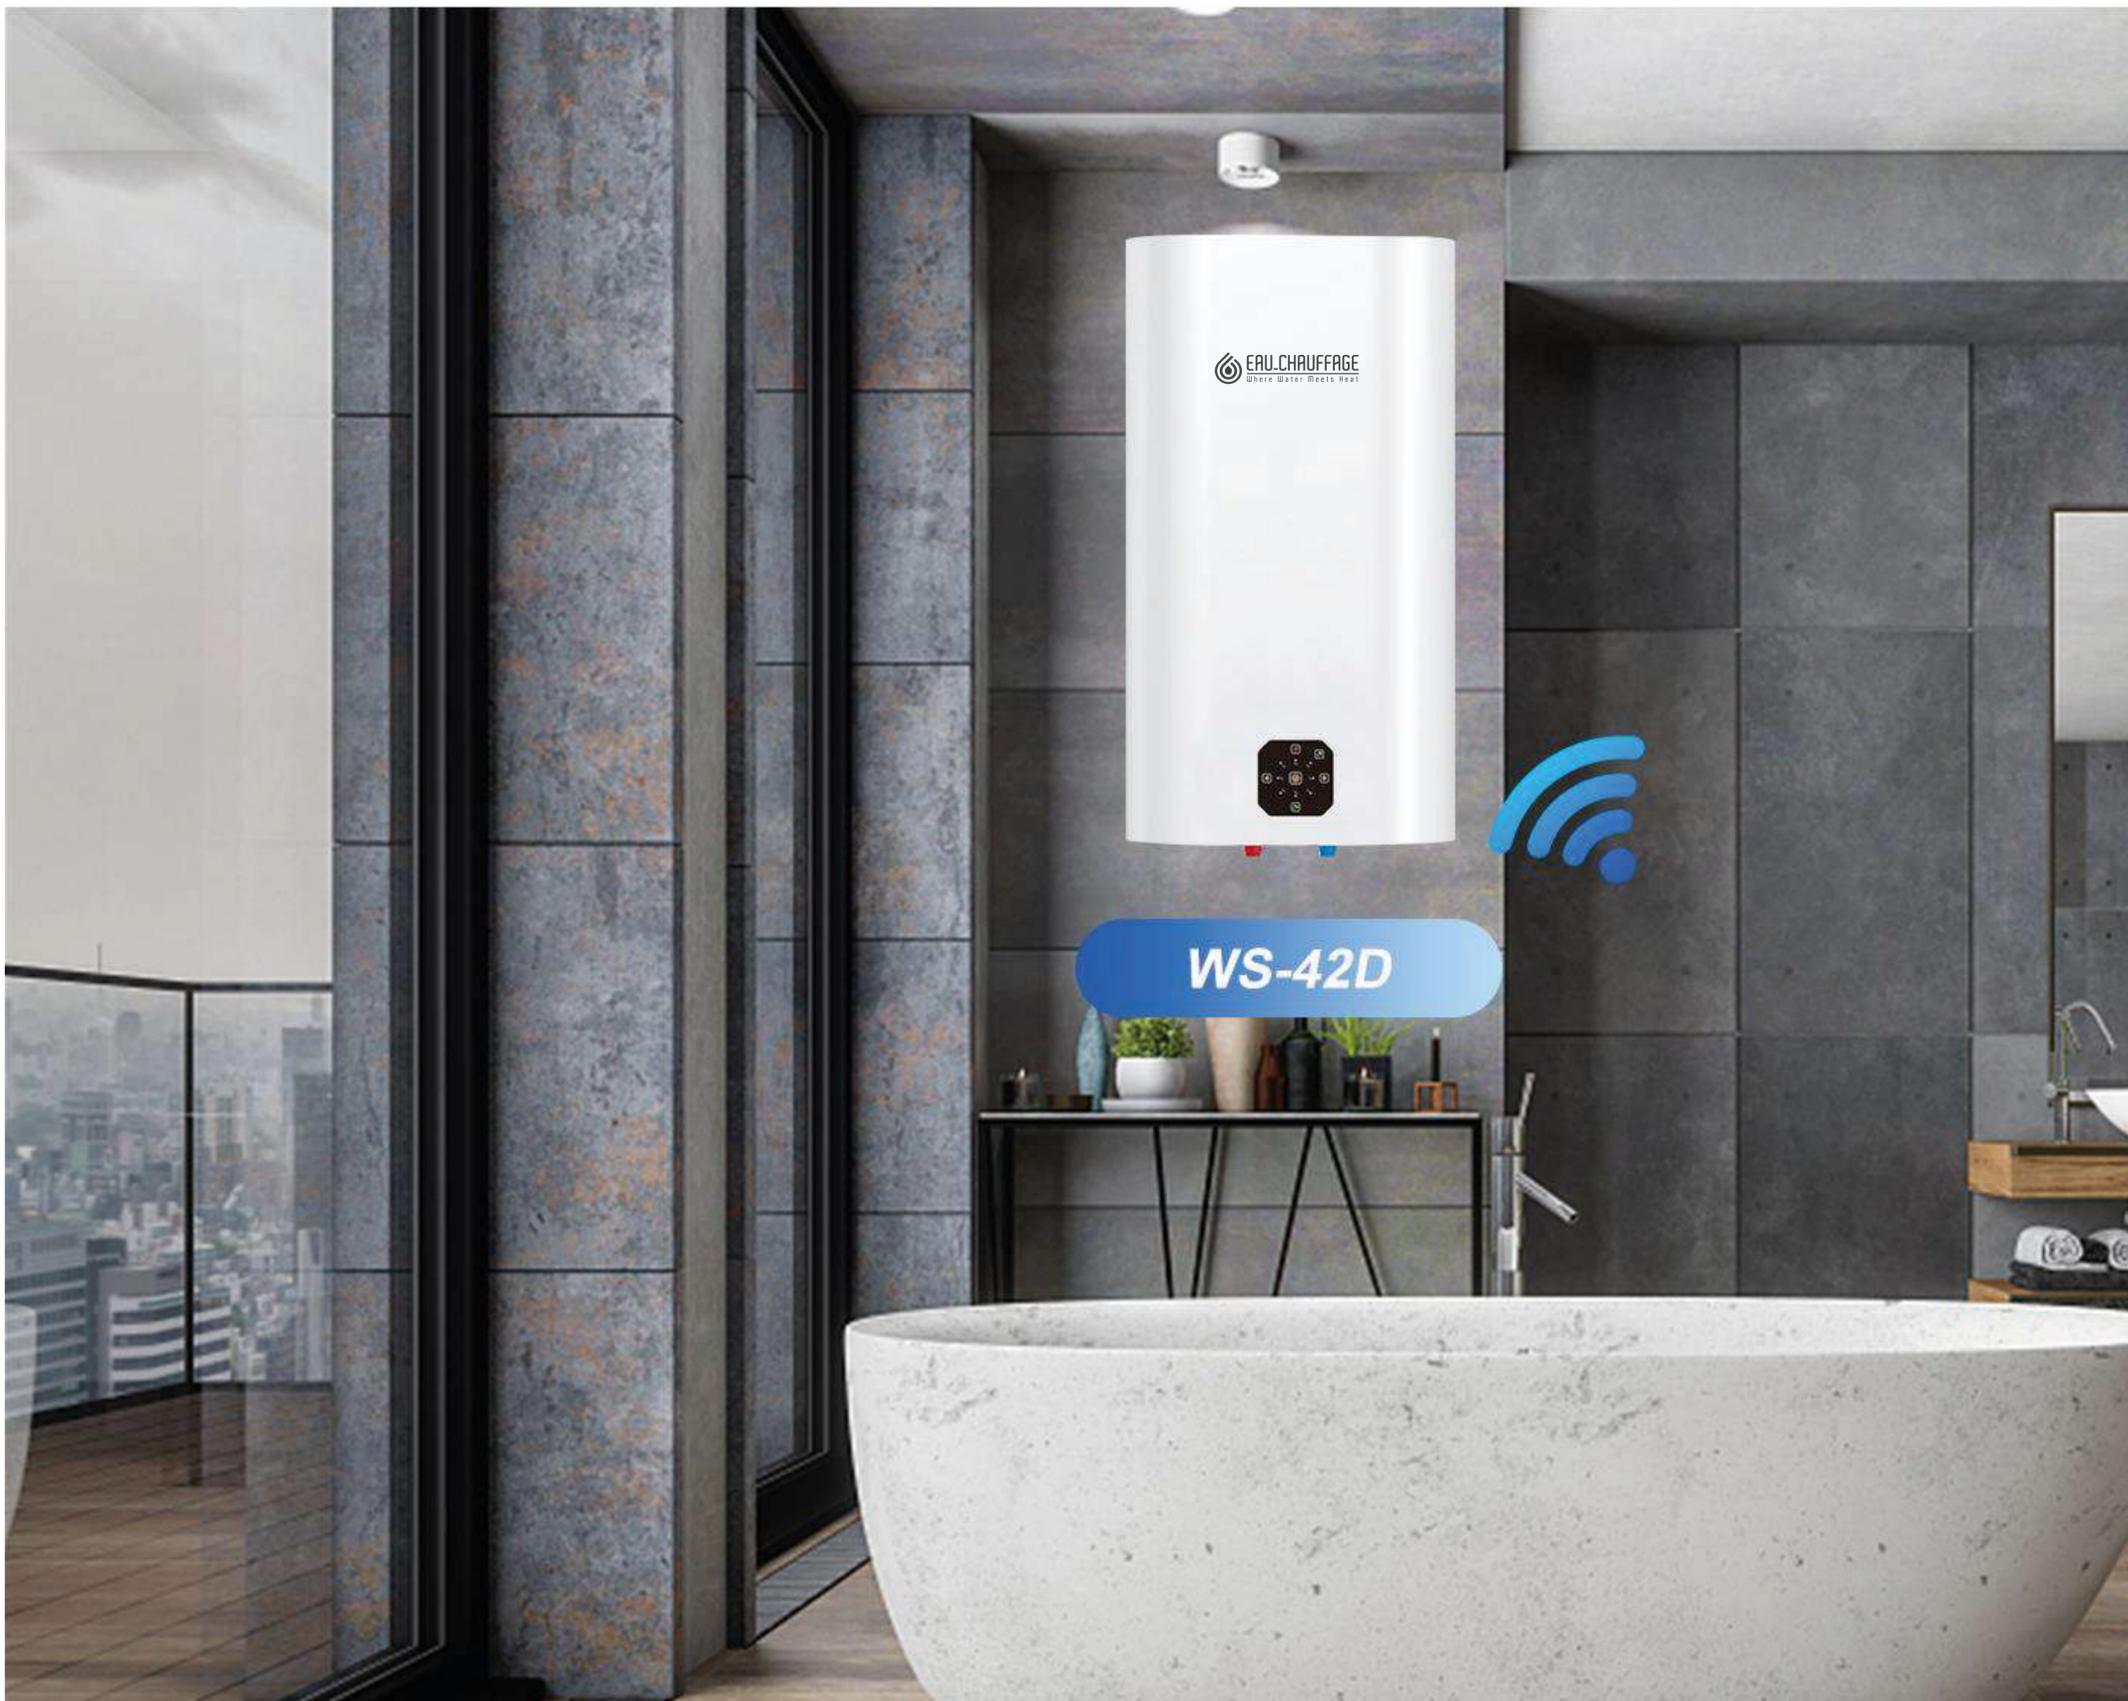

WS-42D

- 
Double Tank
- 
SUS304/316 tank
- 
Magnesium Anode
- 
Safety Protective
- 
Multifunctional Value
- 
LED Digital Display
- 
High Precision Thermostat
- 
WIFI Control
- 
Remote Control
- 
Earthing Protection
- 
Thermal Cutout
- 
Polyurethane Insulation
- 
Touch Screen
- 
Water Proof Grade

Capacity (L)	30L	50L	80L	100L
Product size (mm)	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size (mm)	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty (20GP/40HQ)	280/730	190/495	136/350	113/290

FLAT SERIES (COMPUTER)



WS-B40D



Capacity (L)	30L	50L	80L	100L
Product size (mm)	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size (mm)	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty (20GP/40HQ)	280/730	190/495	136/350	113/290



Capacity (L)	30L	50L	80L	100L
Product size (mm)	570*258*435	855*258*435	950*290*495	1160*290*495
Packing size (mm)	630*300*490	930*300*490	1025*335*555	1240*335*555
N.W.(kg)	8	11	15	18
G.W.(kg)	10	13	17.5	20.5
Loading qty (20GP/40HQ)	280/730	190/495	136/350	113/290



WS-D17D

SQUARE SERIES



Double Tank



SUS304/316 tank



Magnesium Anode



Safety Protective



Multifunctional Value



Vertical & Horizontal Installation



Earthing Protection



Thermal Cutout



Polyurethane Insulation



Water Proof Grade



LED Digital Display



High Precision Thermostat

SPECIFICATION

- Rated Voltage: 220V~240V
- Rated Frequency: 50Hz/60Hz
- Rated Power: 2000W
- Temperature Range: 30-75°C
- Rated Pressure: 0.7MPa

Capacity (L)	30L	50L	80L	100L
Product size (mm)	535*260*500	735*260*500	535*260*502	535*260*503
Packing size (mm)	620*335*555	820*335*555	1160*335*555	1390*335*555
N.W.(kg)	12.5	15	18.5	23
G.W.(kg)	13	17	21	27
Loading qty (20GP/40HQ)	225/570	170/435	120/305	100/255

KITCHEN SERIES



WS-FX01

SPECIFICATION

- Rated Voltage:220V~240V
- Rated Frequency:50Hz/60Hz
- Rated Power:1500W
- Temperature Range:30-75°C
- Rated Pressure: 0.7MPa



Capacity (L)	8L	10L	15L	25L
Product size (mm)	300*300*262	300*300*302	350*350*315	380*380*320
Packing size (mm)	360*360*340	360*360*380	420*420*390	420*420*395
N.W.(kg)	2.5	3	4	6
G.W.(kg)	3	4	5	7
Loading qty (20GP/40HQ)	635/1500	570/1345	410/970	405/955



WS-FX02

Capacity (L)	8L	10L	15L	20L	25L
Product size (mm)	255*255*300	255*255*350	255*255*450	255*255*505	255*255*595
Packing size (mm)	310*310*380	310*310*430	310*310*530	310*310*585	310*310*675
N.W.(kg)	3.5	3.5	4	5	6
G.W.(kg)	4	4.5	5	6.2	7.5
Loading qty (20GP/40HQ)	711/1830	629/1610	510/1320	462/1180	400/1030

KITCHEN SERIES



EAU-CHAUFFAGE
Where Water Meets Heat

WS-FX02



Capacity (L)	8L	10L	15L	20L	25L
Product size (mm)	255*255*300	255*255*350	255*255*450	255*255*505	255*255*595
Packing size (mm)	310*310*380	310*310*430	310*310*530	310*310*585	310*310*675
N.W.(kg)	3.5	3.5	4	5	6
G.W.(kg)	4	4.5	5	6.2	7.5
Loading qty (20GP/40HQ)	711/1830	629/1610	510/1320	462/1180	400/1030



Capacity (L)	10L	15L
Product size (mm)	270*270*375	270*270*465
Packing size (mm)	310*310*480	310*310*505
N.W.(kg)	4.5	5.4
G.W.(kg)	5	6
Loading qty (20GP/40HQ)	563/1650	535/1375



WS-X1

KITCHEN SERIES



Capacity (L)	10L	15L
Product size (mm)	270*270*375	270*270*465
Packing size (mm)	310*310*480	310*310*505
N.W.(kg)	4.5	5.4
G.W.(kg)	5	6
Loading qty (20GP/40HQ)	563/1650	535/1375

WS-X5



Capacity (L)	10L	15L
Product size (mm)	270*270*375	270*270*465
Packing size (mm)	310*310*480	310*310*505
N.W.(kg)	4.5	5.4
G.W.(kg)	5	6
Loading qty (20GP/40HQ)	563/1650	535/1375



WS-X6

KITCHEN SERIES



WS-X7



Capacity (L)	10L	15L
Product size (mm)	270*270*375	270*270*465
Packing size (mm)	310*310*480	310*310*505
N.W.(kg)	4.5	5.4
G.W.(kg)	5	6
Loading qty (20GP/40HQ)	563/1650	535/1375



Capacity (L)	10L	15L
Product size (mm)	270*270*375	270*270*465
Packing size (mm)	310*310*480	310*310*505
N.W.(kg)	4.5	5.4
G.W.(kg)	5	6
Loading qty (20GP/40HQ)	563/1650	535/1375



WS-B20

ENERGY WATER TANK



WS-K1S

EAU-CHAUFFAGE
Where Water Meets Heat

DAIKIN

GREE



Single Tank



SUS304/316 tank



Magnesium Anode



Safety Protective



Multifunctional Value



Earthing Protection



Thermal Cutout



Polyurethane Insulation



Water Proof Grade



High Precision Thermostat

SPECIFICATION

- Rated Voltage:220V~240V
- Rated Frequency:50Hz/60Hz
- Temperature Range:30-75℃
- Rated Pressure: 0.7MPa
- Diameter of water pipes G1/2 Male Inlet/Outlet
- Diameter of Exchange coil G3/8 Male Inlet/Outlet

Capacity (L)	40L	70L	100L
Product size (mm)	258*436*720	400*400*874	444*444*874
Packing size (mm)	790*295*515	930*415*440	935*470*480
N.W.(kg)	10.9	14.5	16.5
G.W.(kg)	11.9	15.5	17.6
Loading qty (20GP/40HQ)	216/550	153/390	123/310

COLD AND HOT WATER HEATER

WS-HC2D

EAU.CHAUFFAGE
Where Water Meets Heat

26.95



Single Tank



SUS304/316 tank



Magnesium Anode



Safety Protective



Multifunctional Value



Vertical & Horizontal Installation



LED Digital Display



Earthing Protection



Thermal Cutout



Polyurethane Insulation



Water Proof Grade



High Precision Thermostat



Touch Screen

Inner tank Material	Stainless steel: 316/304
Body and cover material	White Metal
Rated voltage	220~240V
Rated current	50Hz:2.7A;60Hz:2.9A
Rated refrigerant power	50Hz:450W;60Hz:500W
Temperature range	10°C-75°C
Refrigerant model	R134a 135g
Rated heating power	1300W
Max pressure of tank	1.2 MPa
Annual energy consumption	1595kWh
Capacity (L)	50L
Product size (mm)	426*426*870
Packing size (mm)	480*480*970
N.W.(kg)	33
G.W.(kg)	40
Loading qty (20GP/40HQ)	115/290

HEAT PUMP



EAU-CHAUFFAGE
Where Water Meets Heat

WS-BD1

SPECIFICATION

- Rated Voltage:220V~240V
- Rated Frequency:50Hz/60Hz
- Rated Power:1500W
- Temperature Range:30-75°C
- Rated Pressure: 0.7MPa



Capacity (L)	200L	300L	400L	500L
Product size (mm)	756*410*1178	868*466*1362	868*466*1707	868*466*2047
Packing size (mm)	850*570*1266	960*640*1450	960*640*1795	960*640*2135
N.W.(kg)	43	54	61	77
G.W.(kg)	76	58	66	83
Loading qty (20GP/40HQ)	45/105	29/74	23/59	19/50



Capacity (L)	200L	300L	400L	500L	600L
Product size (mm)	520*520*1520	560*560*1820	700*700*1540	700*700*1860	700*700*2110
Packing size (mm)	595*595*1600	635*635*1900	790*790*1630	790*790*1950	790*790*2200
N.W.(kg)	42	53	70	81	91
G.W.(kg)	45.5	58	75	87	98
Loading qty (20GP/40HQ)	46/98	34/70	25/50	21/45	19/40



EAU-CHAUFFAGE
Where Water Meets Heat

WS-YD2

INDIRECT WATER HEATER



WS-RJ1



SPECIFICATION

- Rated Voltage:220V~240V
- Rated Frequency:50Hz/60Hz
- Rated Power:2000W
- Temperature Range:30-75°C
- Rated Pressure: 0.7MPa
- Material of tubular exchanger: SUS316L

Capacity (L)	80L	100L	120L
Product size (mm)	990*510*290	1190*510*290	1390*510*290
Packing size (mm)	1055*565*335	1255*565*335	1455*565*335
N.W.(kg)	20.7	23.6	27.2
G.W.(kg)	22.7	26	31
Loading qty (20GP/40HQ)	140/330	118/275	100/240

SOLAR PHOTOVOLTAIC WATER HEATER

EAU-CHAUFFAGE
Where Water Meets Heat



Double Tank



SUS304/316 tank



Magnesium Anode



Safety Protective



Multifunctional Value



LED Digital Display



Earthing Protection



Thermal Cutout



Polyurethane Insulation



Water Proof Grade



High Precision Thermostat

SPECIFICATION

- Rated Voltage:220V~240V
- Rated Frequency:50Hz/60Hz
- Rated Power:1500W
- Temperature Range:30-75°C
- Rated Pressure: 0.7MPa

Product name	Solar Photovoltaic Water Heater
Mounting type	Vertical or Horizontal
Control panel	Mechanical or Digital or WIFI
Power	2000w
Tank capacity	30L 50L 80L 100L150L
Effluent temperature	30-75°C
DC power cable	2*2.5mm ²
Heating mode	Photoelectric dual-purpose
Body shell color	White
Temperature of DC control	65°C ON 75°C OFF

ELECTRIC WATER HEATERS



EAU CHAUFFAGE
Where Water Meets Heat

MONTREAL, QUEBEC, CANADA



WWW.EAUCHAUFFAGE.CA